

**Push-in Fittings**

**WPGJT SERIES**




**Product features**

- It's made of copper pneumatic piping joints
- Not only the body but also the sleeve, both of them are made from copper, which is good for flame resistance, heat resistance and splash performance

**Speciality**

Operating Temperature	-20~+80°C
Operating Pressure	0-1.0MPa
Fluid	Aia, Vacuum
Applicable Tube	Polyurethane and Nylon

**Dimension**

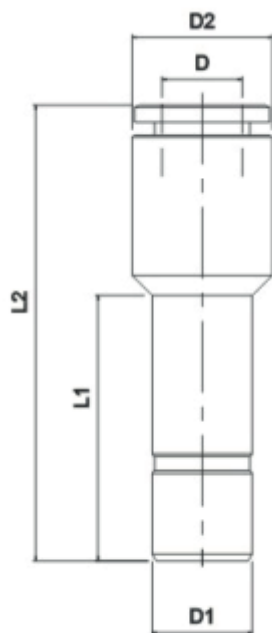

MODEL	φD	φD1	φD2	L1	L2
WPGJT06-04	4	6	9	21	34.5
WPGJT08-06	6	8	12	22	42
WPGJT10-08	8	10	14	25.5	46.5
WPGJT12-10	10	12	16	26	49.5